



KAA Kenya Airports Authority

Head Office, Airport North Road
P.O Box 19001-00501 Nairobi, Kenya.
Tel:+254- 020- 822 111/ 6611000/6612000
Fax: +254-020- 822078, 827304.
Email: info@kaa.go.ke
www.kaa.go.ke

KAA/OT/BANISSA/0076/2023-2024

21st November, 2023

To: All Tenderers

**RE: PROPOSED GATE, GATEHOUSE, WASHROOMS, AND
FENCING OF BANISSA AIRSTRIP – MANDERA COUNTY**

TENDER NO. KAA/OT/BANISSA/0076/2023-2024

ADDENDUM NO. 4

The following are tender clarifications/addendum issued regarding the above tender in accordance to instructions to tenderers clause 8.1 of the bidding document for the referenced tender.

No.	INQUIRY	RESPONSE
1.	On page 24, 'Bidders shall submit the following documents which shall be certified by the employer as true copies of the original to be used for evaluation' Kindly clarify the 'employer' as page 53 describes the employer being KAA (conditions of contract)	The above item No. 4 of the Technical Qualification requirement on page 24 of the tender document will be amended to read. "Bidders shall submit the following documents which shall be certified by a Notary Public or Commissioner of Oaths as true copies of the original to be used for evaluation"
2.	On page 124 (Bills of Quantities), The entire item on External works is unquantified. Bidders to replace the entire BOQ from pages 72 to 143 with the new BOQ with the correct title and page summaries	Bidders are informed that the entire bill of quantities has been replaced as attached.
3.	There is some discrepancy on Chain link fencing description on the specification (page 87) and the drawing.	The clarifications for the fence type is as follows: - i. The description of works in under item 5 "E" iv on page 73 of the tender document should read "High Density Galvanized Welded Razor Fence" instead of "Chain-link Fence.

		ii. The description of the fence type under Fencing Works Bill item No. 6, P on page No. 139 clearly reads "Supply and Install High-Density Galvanized Welded Razor Mesh with Diamond Apertures", this also corresponds to the drawing No. A (01) 02 with the title "Razor Wire Fence Details" as attached.
4.	The Title on BOQ pages 74, 75,76,77, 78, 80, 81, 82, 83, 84, 85, 86, 90, 91, 92, 94, 95, 96, 97, 98, 99, 100, 101, 102, 104, 105, 106, 123, 124 and 125 reading "PROPOSED CONSTRUCTION OF GATE HOUSE, WASHROOMS AND CHAINKINK FENCE AT BANISA AIRSTRIP"	Bidders are informed that they need to replace the title to read "PROPOSED GATE, GATEHOUSE, WASHROOMS, AND FENCING AT BANISSA AIRSTRIP"

The closing/opening date is hereby extended to **28th November, 2023 at 11:00 am from 21st November 2023 at 11.00 a.m.**

Kindly ensure your tender is valid for a period of **126 days** and your tender security is valid for a period of **156 days** from the NEW closing/opening date of **28th November, 2023 at 11.00. a. m.**

This addendum forms part of the bidding document and is binding on all bidders. All other conditions remain the same.


Lilian Okidi

Ag.GM (PROCUREMENT AND LOGISTICS)

For: MANAGING DIRECTOR/CEO



see separate sheet for details of key

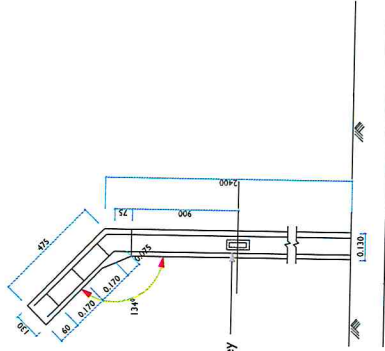

see separate sheet for details of key

4 No. 8mm M.S bars

12.5 S.W.G stirrups
at 350 c/s.

NOTES:

1. concrete shall be class 25 (10)
2. minimum cover to reinforcement shall be 20mm
3. 10mm chamfers shall be formed along all edges except on the key face


joint buttered with
1:2 cement mortar

10mm threaded galvanised rod


nut and washer



END VIEW SHOWING STRUT KEY




STRAINING POST AND STRUT JOINT



TYPICAL SECTION


INTERMEDIATE POST DETAILS

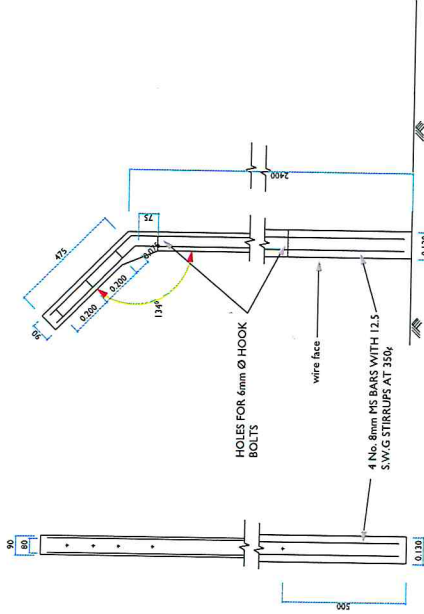


HOLES FOR 6mm Ø HOOK
BOLTS

wire face

4 No. 8mm M.S bars with 12.5
S.W.G stirrups at 350 c/s

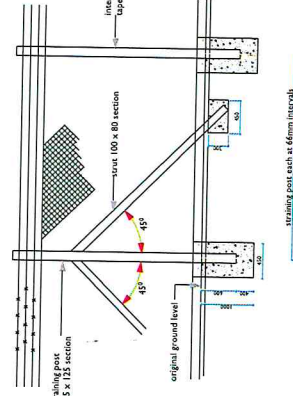

STRAINING POSTS

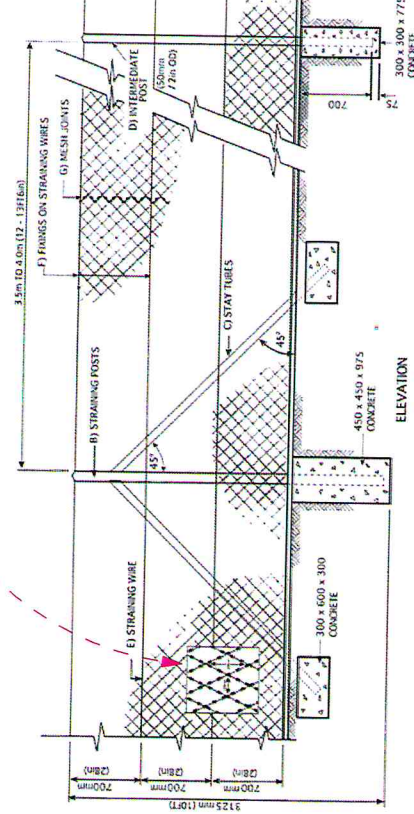

RAZOR MESH FENCE ELEVATION

NOTES

1. This drawing is protected by the Copyright Act and cannot be used or reproduced in part or in whole without author's consent.
2. All dimensions in mm unless stated, should be read and not measured.
3. Construction must verify all dimensions and levels before commencing work any discrepancy should be reported to the Architect before work is put at hand.
4. P.V denotes a permanent ventilation and must be provided above all doors and windows where indicated.
5. D.P.C denotes (Damp Proof Course), one layer of 150mm thick concrete to be provided under all walls, 150mm above G.L.
6. All drainage crossing the Road to be enclosed in concrete to suit engineer's detail.



Kenya Airports Authority

P. O. Box 19001-00501 NAIROBI

Tel: 6611000/6612000

Fax: 822078

E-Mail: info@kaa.go.ke

Website: www.kaa.go.ke

Project:

PROPOSED FENCING, GATE HOUSE &
WASHROOMS AT BANISA AIRSTRIP.

Drawing Title:

RAZOR WIRE FENCE DETAILS

Project No.:

Designed by:

Z. Onyienka

Drawn by:

A. Wako

Checked by:

Eng. J. Wagai

Manager, (AD&C)

Approved by:

Eng. S. Mochache

Ag. General Manager (P&ES).

Dwg No.

A10102

Scale:

As Shown

Date:

Sept. 2023

North:



